



64041 Wavelength




64042 Stereo

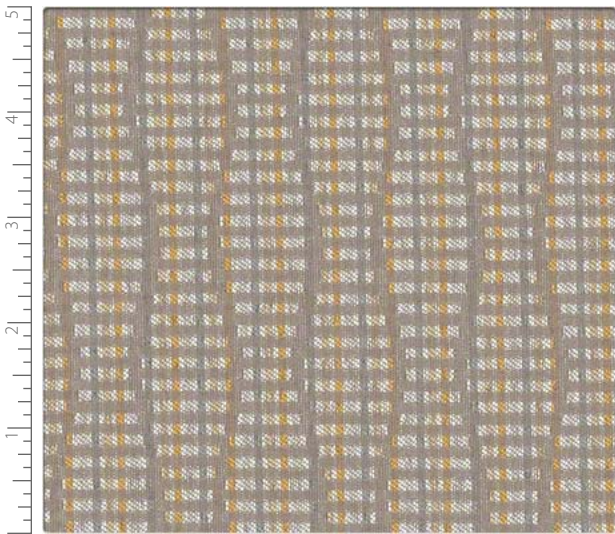

64043 Sound

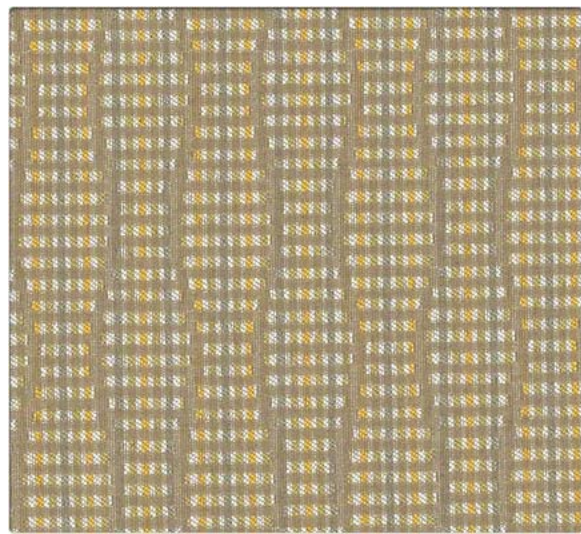


64044 Radio

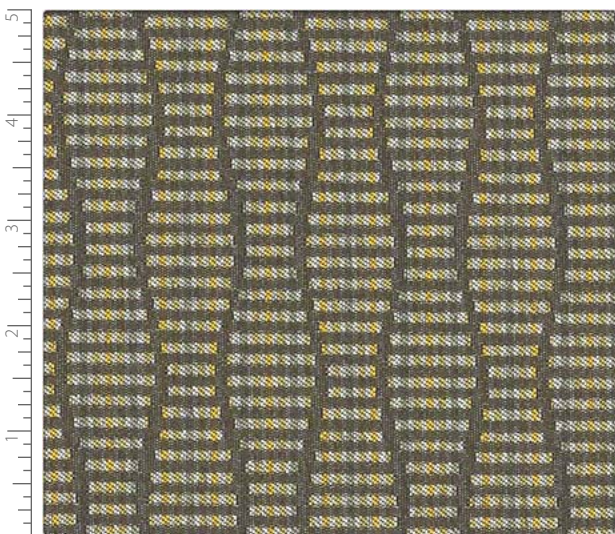


64045 Tone




64051 Pitch

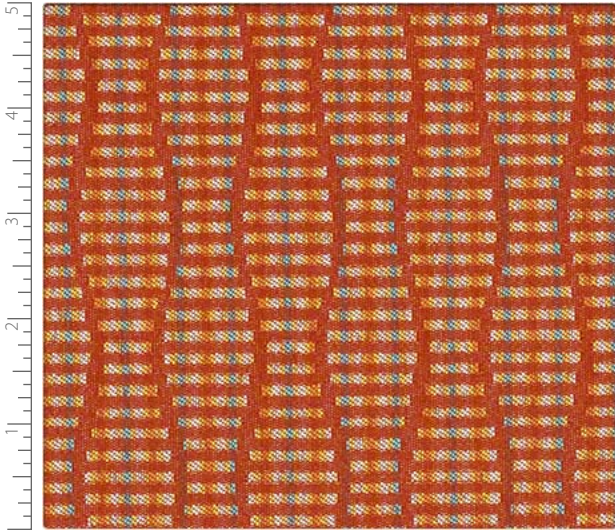


64047 Clarity

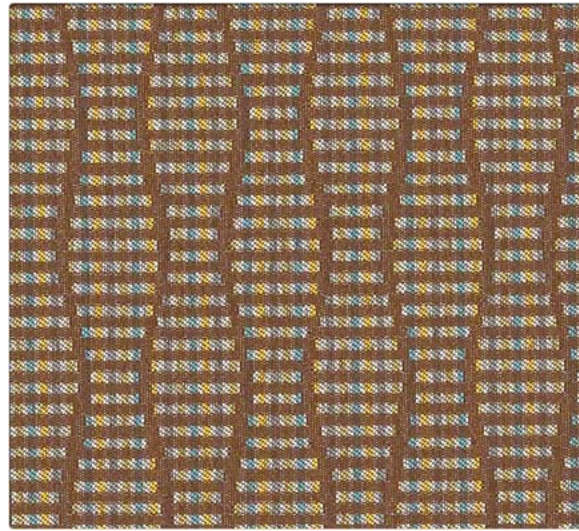


64048 Volume

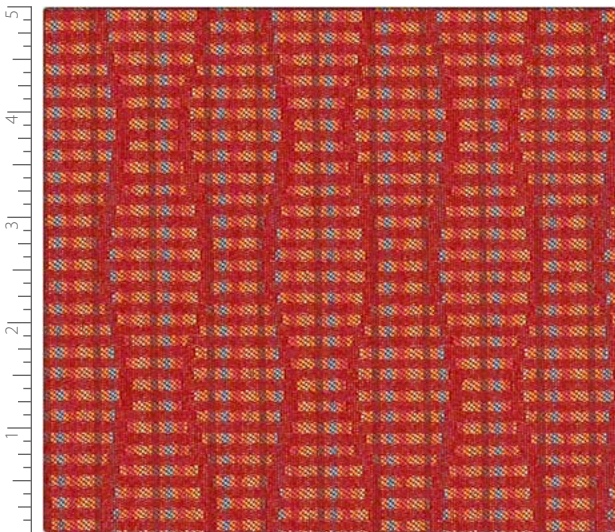

64049 Harmony

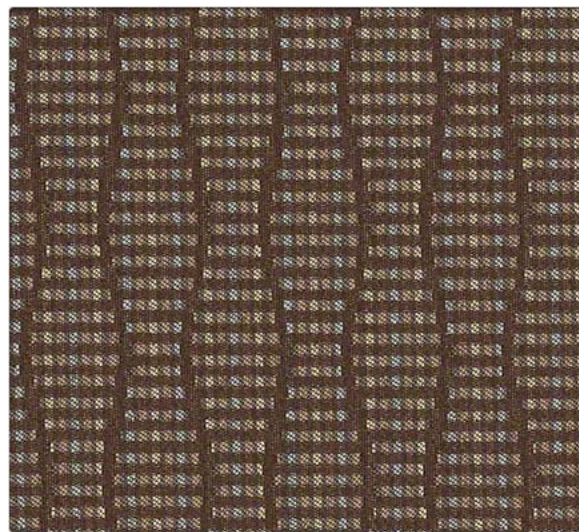

64050 Frequency

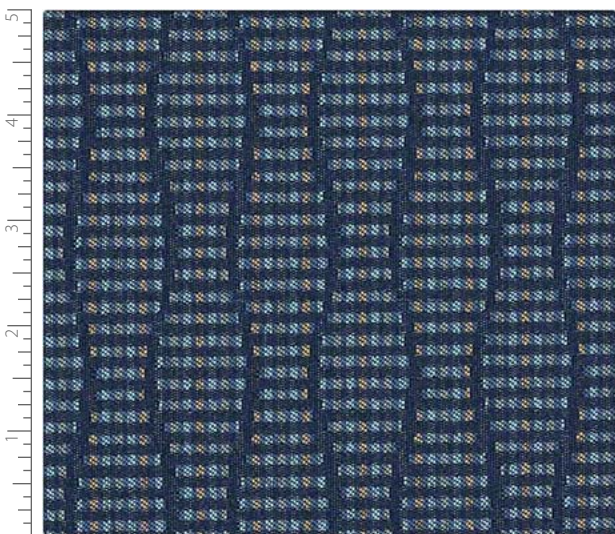

64046 Rhythm

Performance Summary

- Enhanced soil + stain resistance
- Enhanced abrasion resistance
- Bleach-solution cleanable

Environmental

- GREENGUARD Gold Certified
- NSF/ANSI 336 FACTS Silver Certified
- Recycled content
- Non PFOA Stain Resistance
- No added flame retardants
- No added antimicrobials

Cleaning and Maintenance

Cleaning Code: **(W-S)** For water-based stains use water-based cleaners. For oil-based stains use solvent-based cleaners. We recommend using a professional cleaning service.

Bleach solutions of up to 10% may be used for more difficult stains.

Dye lots may vary slightly.

* This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

Specifications



Content	47% Polyester, 34% Post Industrial Recycled Polyester, 19% Post Consumer Recycled Polyester
Finish	Non-PFOA Stain Resistant
Backing	Acrylic
Weight	8.9 oz./lin. yd. ± 1.0 oz.
Width	54 inches
Repeat	Horizontal: 2.5 inches, Vertical: 1.5 inches, shown railroaded, directional
Roll Size	50.0 yards
	Made in the USA

Performance Characteristics

Abrasion Resistance ASTM D-4157	Exceeds 51,000 double rubs - heavy duty
Break Strength ASTM D-5034	Warp: 158.0 lbs. min., Fill: 172.0 lbs. min.
Tear Strength ASTM D-2261	Warp: 13.0 lbs. min., Fill: 23.0 lbs. min.
Seam Slippage ASTM D-4034	Warp: 48.0 lbs. min., Fill: 69.0 lbs. min.
Brush Pilling ASTM D-3511	Class 5.0 min.
Colorfastness to Light AATCC-16	40 Hours, Class 4.0
Crocking AATCC-8	Dry: Class 4.0, Wet: Class 3.0

Flammability*

California Technical Bulletin 117-2013 Section 1	Passed
UFAC	Class 1
NFPA 260	Class 1



This product is produced using 53% recycled fiber.



Tel: 905.896.3434

Toll free: 1.800.363.8954

info@nightingalechairs.com

www.nightingalechairs.com

Stinson®

C.F. Stinson, LLC
2849 Product Drive
Rochester Hills, MI 48309

P 800 841 6279

F 248 299 3884

cfstinson.com